

3 POINT HITCH SEEDERS

SM 155 / 185 / 205




Technical Data

SEEDER TYPE	SM 155	SM 205
Weight	530 kg	712 kg
Dimensions : (mm)		
Length	1140	1140
Width	x 1780	x 2280
Height	x 1100	x 1100
Seeding width	1500 mm	2000 mm
Seeding depth	0 mm < accurate seeding < 12 mm	
Required power	30 to 60 HP	50 to 95 HP
3 point hitch	Categories 1 & 2	
Standard equipment	<ul style="list-style-type: none"> • Front and rear iron cast notched rollers • Double floating axles (rear roller) • Scrapers front & rear • Coil tine track remover kit • Movable 3 point-hitch • Stainless steel seed-box • Seed gauge • Windproof guarding 	
Distribution and seed rate adjustment (highly accurate)	<ul style="list-style-type: none"> • Seed valve agitator • Fine seeding with dial seed valve 	
Seed volume	150 litres	200 litres

SEVERAL OPERATIONS IN A SINGLE PASS

The 3 point hitch DAIRON seeder performs the following operations in a single pass :

- **GROUND GRADING AND COMPRESSING**, thanks to rollers which compress top soil clods and debris.
- **BURYING OF SMALL PARTICLES** which trouble fine seeding : small flints with under 20 mm diameter, overgrowth,...
- **SEEDING ALL KINDS OF TURF SEEDS**, by means of high capacity stainless steel seed-box.
- **SEEDING ALL TYPES OF GROUND**, whether flat or undulating, dry or wet, sloped or unprepared by using the floating rear roller

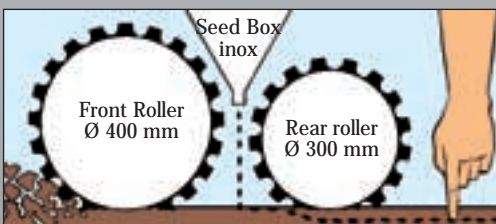

The front roller breaks clods and levels the seedbed

The rear roller covers and presses the seed to a maximum 12mm depth.



M.G.E. Le Mans - Photos HIRN - I.T.F. IMPRIMEURS - 012001 - 21252

DAIRON S.A.

Les Hunaudières - D 92
72230 MULSANNE - FRANCE
Tél. (33) 02 43 23 09 10
Fax (33) 02 43 23 14 97
E.mail : MGE@mge-dairon.com
web : www.mge-dairon.com



RotaDairon, since 1958



ROTADAIRON:AN EXCEPTIONAL PROFITABILITY

DAIRON : PERFECT SEEDING

OVERSEEDER CR



The Overseeder CR 140 for Sportsfields & fairways

PEDESTRIAN SEEDER *Seedy*



Seeding of small areas with the *Seedy*

SM 155



Dethatcher DE 125



• All our machines are protected by patents
• This document is not contractually binding

TECHNICAL DATA

RotaDairon model	Roller type	Required power	Seeding width	Hopper Capacity	Total weight
• RotaDairon & Green Service compact seeders					
SEEDY	Mesh roller	manual/Stony	680 mm	55 litres	48 kg
HP 600	2 x twin roller	manual	600 mm	45 litres	39 kg
SMK I	2 x twin roller	self-propelling	720 mm	55 litres	125 kg
• 3 point-hitch primary seeder with double cast iron notched rollers					
SM 155	2 x rollers	30 to 50 HP	1500 mm	150 litres	530 kg
SM 205	+coil tine track	50 to 95 HP	2000 mm	200 litres	712 kg
SMA 305	removal kit	60 to 100 HP	3290 mm	750 litres	1500 kg
SMA 405		80 to 150 HP	4350 mm	1000 litres	2000 kg
• RotaDairon overseeders					
CR 140	stainless steel	20 to 50 HP	1400 mm	150 litres	370 kg
CR 200	construction	25 to 60 HP	2000 mm	200 litres	540 kg
• Green Service dethatchers					
DE 100	2 x steel roller	15 to 30 HP	1000 mm	Special knives	160 kg
DE 125	2 x steel roller	20 to 35 HP	1250 mm		221 kg

